


## SPL-G Male Elbow Swivel - BSPP,G Thread Stainless Steel Push in Fittings

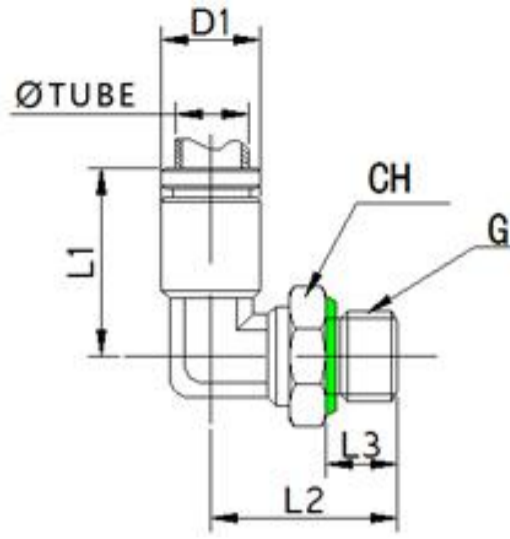

**Material:** 316 Stainless Steel  
**Fluid Admitted:** Air, Water, Steam, and Other Liquid  
**Working Pressure:** 0~2.0MPa | 0~290psi  
**Proof Pressure:** 3.0Mpa | 435psi  
**Negative Pressure:** -100Kpa | -29.5 In Hg  
**Working Temperature:** 20~150°C | -4~302°F  
**Applicable Tube:** PU / PA / Teflon Tubing  
**Seal, O-ring:** FKM (Viton)

### Metric Tubing to G, BSP, BSPP Thread Male Elbow Swivel Stainless Steel Push in Fittings

PART NO.	Tube ØD	G	L1(mm)	L2(mm)	L3(mm)	D(mm)	CH2(mm)
SPL 04-G01	4	G1/8	17	20	6	9	14
SPL 04-G02	4	G1/4	17	21	7	9	17
SPL 06-G01	6	G1/8	24	20	6	11	14
SPL 06-G02	6	G1/4	24	21	7	11	17
SPL 06-G03	6	G3/8	24	21	7	11	19
SPL 06-G04	6	G1/2	24	22	9	11	24
SPL 08-G01	8	G1/8	27	21.5	6	13.6	14
SPL 08-G02	8	G1/4	27	22.5	7	13.6	17
SPL 08-G03	8	G3/8	27	22.5	8	13.6	19
SPL 08-G04	8	G1/2	27	23.5	8	13.6	24
SPL 10-G01	10	G1/8	30.5	24	6	15.6	17
SPL 10-G02	10	G1/4	30.5	25	7	15.6	17
SPL 10-G03	10	G3/8	30.5	25	7	15.6	19
SPL 10-G04	10	G1/2	30.5	26	8	15.6	24
SPL 12-G02	12	G1/4	34	29	7	18.6	19
SPL 12-G03	12	G3/8	34	29	7	18.6	19
SPL 12-G04	12	G1/2	34	30	8	18.6	24
SPL 14-G02	14	G1/4	37	33	7	20.6	24
SPL 14-G03	14	G3/8	37	33	7	20.6	24
SPL 14-G04	14	G1/2	37	34	8	20.6	24
SPL 16-G02	16	G1/4	38	30	7	22.6	24
SPL 16-G03	16	G3/8	38	30	7	22.6	24
SPL 16-G04	16	G1/2	38	31	8	22.6	24

### Inch Tubing to G, BSP, BSPP Thread Male Elbow Swivel Stainless Steel Push in Fittings

PART NO.	Tube ØD	G	L1(mm)	L2(mm)	L3(mm)	D(mm)	CH2(mm)
SPL 5/32-G01	5/32"	G1/8	17	20	6	9	14
SPL 5/32-G02	5/32"	G1/4	17	21	7	9	17
SPL 1/4-G01	1/4"	G1/8	24	20	6	11	14
SPL 1/4-G02	1/4"	G1/4	24	21	7	11	17
SPL 1/4-G03	1/4"	G3/8	24	21	7	11	19
SPL 1/4-G04	1/4"	G1/2	24	22	9	11	24
SPL 5/16-G01	5/16"	G1/8	27	21.5	6	13.6	14
SPL 5/16-G02	5/16"	G1/4	27	22.5	7	13.6	17
SPL 5/16-G03	5/16"	G3/8	27	22.5	8	13.6	19
SPL 5/16-G04	5/16"	G1/2	27	23.5	8	13.6	24
SPL 3/8-G01	3/8"	G1/8	30.5	24	6	15.6	17
SPL 3/8-G02	3/8"	G1/4	30.5	25	7	15.6	17
SPL 3/8-G03	3/8"	G3/8	30.5	25	7	15.6	19
SPL 3/8-G04	3/8"	G1/2	30.5	26	8	15.6	24
SPL 1/2-G02	1/2"	G1/4	34	29	7	18.6	19
SPL 1/2-G03	1/2"	G3/8	34	29	7	18.6	19
SPL 1/2-G04	1/2"	G1/2	34	30	8	18.6	24