


SPU Union Straight - Stainless Steel Push in Fittings

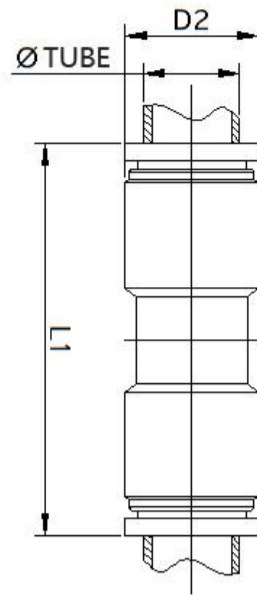

Material: 316 Stainless Steel
Fluid Admitted: Air, Water, Steam, and Other Liquid
Working Pressure: 0~2.0MPa | 0~290psi
Proof Pressure: 3.0Mpa | 435psi
Negative Pressure: -100Kpa | -29.5 In Hg
Working Temperature: 20~150°C | -4~302°F
Applicable Tube: PU / PA / Teflon Tubing
Seal, O-ring: FKM (Viton)

Metric / Inch Tubing Union Straight Stainless Steel Push in Fittings

PART NO.	Tube ØD	L1(mm)	D2(mm)
SPU 04	4	32	10
SPU 06	6	34	12
SPU 08	8	36	14
SPU 10	10	38	16
SPU 12	12	40	19
SPU 14	14	40	21
SPU 16	16	42	23
SPU 5/32	5/32"	32	10
SPU 1/4	1/4"	34	12
SPU 5/16	5/16"	36	14
SPU 3/8	3/8"	38	16
SPU 1/2	1/2"	40	19