


## SPW Union Y Reducer - Stainless Steel Push in Fittings

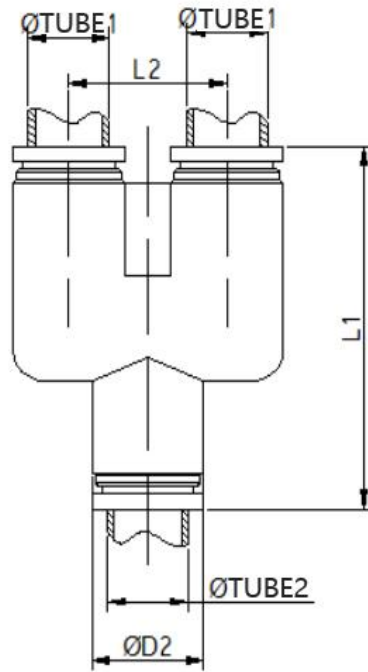

**Material:** 316 Stainless Steel  
**Fluid Admitted:** Air, Water, Steam, and Other Liquid  
**Working Pressure:** 0~2.0MPa | 0~290psi  
**Proof Pressure:** 3.0Mpa | 435psi  
**Negative Pressure:** -100Kpa | -29.5 In Hg  
**Working Temperature:** 20~150°C | -4~302°F  
**Applicable Tube:** PU / PA / Teflon Tubing  
**Seal, O-ring:** FKM (Viton)

### Metric / Inch Tubing Union Y Reducer Stainless Steel Push in Fittings

PART NO.	Tube1 ØD	Tube2 ØD	L1(mm)	L2(mm)	D2(mm)
SPW 06-04	6	4	37.5	16	13
SPW 08-04	8	4	41.3	18	15
SPW 08-06	8	6	41.3	18	15
SPW 10-06	10	6	44.3	21	18
SPW 10-08	10	8	44.3	21	18
SPW 12-08	12	8	51	24	21
SPW 12-10	12	10	51	24	21
SPW 1/4-5/32	1/4"	5/32"	37.5	16	13
SPW 5/16-5/32	5/16"	5/32"	41.3	18	15
SPW 5/16-1/4	5/16"	1/4"	41.3	18	15
SPW 3/8-1/4	3/8"	1/4"	44.3	21	18
SPW 3/8-5/16	3/8"	5/16"	44.3	21	18
SPW 1/2-5/16	1/2"	5/16"	51	24	21
SPW 1/2-3/8	1/2"	3/8"	51	24	21